

AD-A131 128

FORMING OF MAGNETIC FIELDS WITH COMPLEX LAW OF

1/1

VARIAION IN TIME(U) FOREIGN TECHNOLOGY DIV

WRIGHT-PATTERSON AFB OH V V IVASHIN ET AL

01 JUL 83

UNCLASSIFIED

FTD-ID(R5)T-0461-83

F/G 20/3


NL

0

END

FORMED

DATE



MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

2

FTD-ID(RS)T-0461-83

ADA131128


FOREIGN TECHNOLOGY DIVISION



FORMING OF MAGNETIC FIELDS WITH COMPLEX LAW
OF VARIATION IN TIME

by

V.V. Ivashin, E.G. Furman



DTIC
ELECTRONIC
S AUG 5 1983
A

DTIC FILE COPY

Approved for public release;
distribution unlimited.

83 08 3 . 211

EDITED TRANSLATION

FTD-ID(RS)T-0461-83

1 July 1983

MICROFICHE NR: FTD-83-C-000799

FORMING OF MAGNETIC FIELDS WITH COMPLEX LAW OF
VARIATION IN TIME

By: V.V. Ivashin, E.G. Furman

English pages: 12

Source: Trudy, Nauchno-Issledovatel'skogo Instituta
Yadernoy Fiziki Elektroniki i Avtomatiki,
Nr. 2, Atomizdat, Moscow, 1972, pp. 46-52

Country of origin: USSR

Translated by: Marilyn Olacchia

Requester: FTD/TQTD

Approved for public release; distribution unlimited.

THIS TRANSLATION IS A RENDITION OF THE ORIGINAL FOREIGN TEXT WITHOUT ANY ANALYTICAL OR EDITORIAL COMMENT. STATEMENTS OR THEORIES ADVOCATED OR IMPLIED ARE THOSE OF THE SOURCE AND DO NOT NECESSARILY REFLECT THE POSITION OR OPINION OF THE FOREIGN TECHNOLOGY DIVISION.

PREPARED BY:

TRANSLATION DIVISION
FOREIGN TECHNOLOGY DIVISION
WP-AFB, OHIO.

U. S. BOARD ON GEOGRAPHIC NAMES TRANSLITERATION SYSTEM

Block	Italic	Transliteration	Block	Italic	Transliteration
А а	<i>А а</i>	A, a	Р р	<i>Р р</i>	R, r
Б б	<i>Б б</i>	B, b	С с	<i>С с</i>	S, s
В в	<i>В в</i>	V, v	Т т	<i>Т т</i>	T, t
Г г	<i>Г г</i>	G, g	У у	<i>У у</i>	U, u
Д д	<i>Д д</i>	D, d	Ф ф	<i>Ф ф</i>	F, f
Е е	<i>Е е</i>	Ye, ye; E, e*	Х х	<i>Х х</i>	Kh, kh
Ж ж	<i>Ж ж</i>	Zh, zh	Ц ц	<i>Ц ц</i>	Ts, ts
З з	<i>З з</i>	Z, z	Ч ч	<i>Ч ч</i>	Ch, ch
И и	<i>И и</i>	I, i	Ш ш	<i>Ш ш</i>	Sh, sh
Й й	<i>Й й</i>	Y, y	Щ щ	<i>Щ щ</i>	Shch, shch
К к	<i>К к</i>	K, k	Ъ ъ	<i>Ъ ъ</i>	"
Л л	<i>Л л</i>	L, l	Ы ы	<i>Ы ы</i>	Y, y
М м	<i>М м</i>	M, m	Ь ь	<i>Ь ь</i>	'
Н н	<i>Н н</i>	N, n	Э э	<i>Э э</i>	E, e
О о	<i>О о</i>	O, o	Ю ю	<i>Ю ю</i>	Yu, yu
П п	<i>П п</i>	P, p	Я я	<i>Я я</i>	Ya, ya

*ye initially, after vowels, and after ъ, ь; e elsewhere.
When written as ё in Russian, transliterate as yě or ě.

RUSSIAN AND ENGLISH TRIGONOMETRIC FUNCTIONS

Russian	English	Russian	English	Russian	English
sin	sin	sh	sinh	arc sh	sinh ⁻¹
cos	cos	ch	cosh	arc ch	cosh ⁻¹
tg	tan	th	tanh	arc th	tanh ⁻¹
ctg	cot	cth	coth	arc cth	coth ⁻¹
sec	sec	sch	sech	arc sch	sech ⁻¹
cosec	csc	csch	csch	arc csch	csch ⁻¹

Russian English

rot curl

lg log

GRAPHICS DISCLAIMER

All figures, graphics, tables, equations, etc. merged into this translation were extracted from the best quality copy available.

Accession For	
NTIS	
DTIC	
AD	
AN	
AS	
AW	
DA	
DD	
DE	
DF	
DG	
DH	
DI	
DJ	
DK	
DL	
DM	
DN	
DO	
DP	
DQ	
DR	
DS	
DT	
DU	
DV	
DW	
DX	
DY	
DZ	
EA	
EB	
EC	
ED	
EE	
EF	
EG	
EH	
EI	
EJ	
EK	
EL	
EM	
EN	
EO	
EP	
EQ	
ER	
ES	
ET	
EU	
EV	
EW	
EX	
EY	
EZ	
FA	
FB	
FC	
FD	
FE	
FF	
FG	
FH	
FI	
FJ	
FK	
FL	
FM	
FN	
FO	
FP	
FQ	
FR	
FS	
FT	
FU	
FV	
FW	
FX	
FY	
FZ	
GA	
GB	
GC	
GD	
GE	
GF	
GG	
GH	
GI	
GJ	
GK	
GL	
GM	
GN	
GO	
GP	
GQ	
GR	
GS	
GT	
GU	
GV	
GW	
GX	
GY	
GZ	
HA	
HB	
HC	
HD	
HE	
HF	
HG	
HH	
HI	
HJ	
HK	
HL	
HM	
HN	
HO	
HP	
HQ	
HR	
HS	
HT	
HU	
HV	
HW	
HX	
HY	
HZ	
IA	
IB	
IC	
ID	
IE	
IF	
IG	
IH	
II	
IJ	
IK	
IL	
IM	
IN	
IO	
IP	
IQ	
IR	
IS	
IT	
IU	
IV	
IW	
IX	
IY	
IZ	
JA	
JB	
JC	
JD	
JE	
JF	
JG	
JH	
JI	
JJ	
JK	
JL	
JM	
JN	
JO	
JP	
JQ	
JR	
JS	
JT	
JU	
JV	
JW	
JX	
JY	
JZ	
KA	
KB	
KC	
KD	
KE	
KF	
KG	
KH	
KI	
KJ	
KK	
KL	
KM	
KN	
KO	
KP	
KQ	
KR	
KS	
KT	
KU	
KV	
KW	
KX	
KY	
KZ	
LA	
LB	
LC	
LD	
LE	
LF	
LG	
LH	
LI	
LJ	
LK	
LL	
LM	
LN	
LO	
LP	
LQ	
LR	
LS	
LT	
LU	
LV	
LW	
LX	
LY	
LZ	
MA	
MB	
MC	
MD	
ME	
MF	
MG	
MH	
MI	
MJ	
MK	
ML	
MM	
MN	
MO	
MP	
MQ	
MR	
MS	
MT	
MU	
MV	
MW	
MX	
MY	
MZ	
NA	
NB	
NC	
ND	
NE	
NF	
NG	
NH	
NI	
NJ	
NK	
NL	
NM	
NN	
NO	
NP	
NQ	
NR	
NS	
NT	
NU	
NV	
NW	
NX	
NY	
NZ	
OA	
OB	
OC	
OD	
OE	
OF	
OG	
OH	
OI	
OJ	
OK	
OL	
OM	
ON	
OO	
OP	
OQ	
OR	
OS	
OT	
OU	
OV	
OW	
OX	
OY	
OZ	
PA	
PB	
PC	
PD	
PE	
PF	
PG	
PH	
PI	
PJ	
PK	
PL	
PM	
PN	
PO	
PP	
PQ	
PR	
PS	
PT	
PU	
PV	
PW	
PX	
PY	
PZ	
QA	
QB	
QC	
QD	
QE	
QF	
QG	
QH	
QI	
QJ	
QK	
QL	
QM	
QN	
QO	
QP	
QQ	
QR	
QS	
QT	
QU	
QV	
QW	
QX	
QY	
QZ	
RA	
RB	
RC	
RD	
RE	
RF	
RG	
RH	
RI	
RJ	
RK	
RL	
RM	
RN	
RO	
RP	
RQ	
RR	
RS	
RT	
RU	
RV	
RW	
RX	
RY	
RZ	
SA	
SB	
SC	
SD	
SE	
SF	
SG	
SH	
SI	
SJ	
SK	
SL	
SM	
SN	
SO	
SP	
SQ	
SR	
SS	
ST	
SU	
SV	
SW	
SX	
SY	
SZ	
TA	
TB	
TC	
TD	
TE	
TF	
TG	
TH	
TI	
TJ	
TK	
TL	
TM	
TN	
TO	
TP	
TQ	
TR	
TS	
TT	
TU	
TV	
TW	
TX	
TY	
TZ	
UA	
UB	
UC	
UD	
UE	
UF	
UG	
UH	
UI	
UJ	
UK	
UL	
UM	
UN	
UO	
UP	
UQ	
UR	
US	
UT	
UU	
UV	
UW	
UX	
UY	
UZ	
VA	
VB	
VC	
VD	
VE	
VF	
VG	
VH	
VI	
VJ	
VK	
VL	
VM	
VN	
VO	
VP	
VQ	
VR	
VS	
VT	
VU	
VV	
VW	
VX	
VY	
VZ	
WA	
WB	
WC	
WD	
WE	
WF	
WG	
WH	
WI	
WJ	
WK	
WL	
WM	
WN	
WO	
WP	
WQ	
WR	
WS	
WT	
WU	
WV	
WW	
WX	
WY	
WZ	
XA	
XB	
XC	
XD	
XE	
XF	
XG	
XH	
XI	
XJ	
XK	
XL	
XM	
XN	
XO	
XP	
XQ	
XR	
XS	
XT	
XU	
XV	
XW	
XX	
XY	
XZ	
YA	
YB	
YC	
YD	
YE	
YF	
YG	
YH	
YI	
YJ	
YK	
YL	
YM	
YN	
YO	
YP	
YQ	
YR	
YS	
YT	
YU	
YV	
YW	
YX	
YY	
YZ	
ZA	
ZB	
ZC	
ZD	
ZE	
ZF	
ZG	
ZH	
ZI	
ZJ	
ZK	
ZL	
ZM	
ZN	
ZO	
ZP	
ZQ	
ZR	
ZS	
ZT	
ZU	
ZV	
ZW	
ZX	
ZY	
ZZ	



A

FORMING OF MAGNETIC FIELDS WITH COMPLEX LAW OF VARIATION IN TIME

V. V. Ivashin, E. G. Furman

Magnetic fields which are formed in inductive loads are widely used in physic experiments, in thermonuclear experimental units, in the excitation of electromagnetic accelerators and acculator rings, in supplying power to magnets in bubble chambers, etc. Extremely diverse forms of the magnetic cycle are required. For example, the requirement for a constant magnetic field value in an electrical magnet is a typical problem for most operating and projected accelerators and thermonuclear research units [1-4].

When the electromagnet of an accelerator is excited from a capacitor bank for the purpose of forming a flat elevation (plateau) in the curve of an electromagnetic current and, consequently, a magnetic field, energy losses in the winding of the electromagnet must be compensated on the necessary level of the current and maintained with the required accuracy during the formation of a plateau. The stability of the forming field during the duration of the plateau from several to tens of milliseconds can be extremely high and depends on the conditions of the experiment.

The problem of producing a plateau in a magnetic field at maximal energy is extremely difficult from a technological standpoint. It requires the creation of powerful pulsed current, which leads to a substantial increase in the cost of the accelerator, complication of

the power supply system, and lower operating reliability on its part. At the present time considerable attention has been directed toward developing effective pulsed power generators - devices with intermediate energy storage in LC-elements, rotating masses, etc., which assure the necessary power at the output during the forming of the plateau and which require a moderate amount of power from the network, determined primarily by the pulsing ratio [duty ratio] of the generator.

In the case of low pulsing ratios and prolonged plateaus it is best to form the plateau directly from the power supply source without the intermediate storage link.

The use of powerful semiconductor devices for purposes of power switching makes it possible to form powerful pulse fields of the required shape in an inductive load and use capacitive energy accumulators [5-7].

Forming of Magnetic Fields of Quasi-Sinusoidal or Similar Shape

If a plateau is required in the curve of a magnetic cycle of short duration, then a system with unipolar current pulses can be used to power the electromagnet [5, 6]. Here, as a result of the artificial, abrupt change in the circuit from the mode corresponding to angle $\frac{\pi}{2} + \omega t$, to a regime corresponding to angle $\frac{\pi}{2} + \omega t_k$, an artificial change in the length of the pulse peak is obtained. Let us look at such a working mode using the excitation of a betatron electromagnet by current pulses of higher frequency as our example [5] (Fig. 1).

In its original state energy storage capacitor C is charged to the required voltage, while buffer capacitor C₁ is charged by a rectifier current switched to terminals 1 and 2. When the pulses reach thyristors T₁ and T₂ the capacitor bank is discharged to the electromagnet and the leading front of the current pulse is formed in it. When the polarity of the voltage on capacitor C changes, diodes \mathcal{D}_1 and \mathcal{D}_2 open and the direct-current controlable reactor begins to reverse its magnetic polarity. At moment in time T₃ under the effect of voltage

U_{C1} the thyristors are switched off and the current of the electromagnet is completely drawn into the circuit of diodes \mathcal{A}_1 and \mathcal{A}_2 . Here the direction that the current takes through capacitor C reverses, and it [capacitor] is recharged at the same polarity that it is discharged. At the moment that the current is intercepted or after a slight delay thyristor T₃ in the pulsed energy input circuit is switched on and energy is admitted to the oscillatory circuit from the buffer capacitor and the rectifier through charge reactor \mathcal{L}_1 . The input of energy is accompanied by certain decrease in the duration of the current drop in the electromagnet.

The length of the plateau can be assumed equal to $4\omega t_k$ (see Fig. 1b), while stability is determined as

$$\delta = \frac{\Delta I}{I} = 0,5(\omega t_k)^2 \exp\left(-\frac{4L}{R}t_k\right) \quad (1)$$

where R is the effective resistance of the circuit.

To increase the stability and length of the formed current pulse peak in the generator system of quasi-trapezoidal current pulses [6], it is possible, using the principles of pulse-width modulation [8] to use the remaining energy of the energy storage capacitor in the capacity of an energy source to compensate losses in the electromagnet. The formation of a highly stable plateau in an induction load is shown schematically in Fig. 2.

In its original state the energy storage capacitor C and switching capacitors C₁ and C₂ are charged to the required voltages (see Fig. 2a). When the necessary current is reached in the electromagnet L, thyristor T₃ is switched on. The discharge current of switching capacitor C₁ cuts off thyristor T₁, the energy storage capacitor is cut off from the electromagnet, and circuit L, T₂, \mathcal{A}_1 is shorted. The electromagnet current during time interval T₃-T₂ drops exponentially. At moment T₃ thyristor T₁ is switched on again, diode \mathcal{A}_1 is switched off, part of the energy from the energy storage capacitor enters the electromagnet, at moment in time T₄ the accumulator is switched off, etc.

By the end of the formation of the plateau in the electromagnet thyristor T_4 is switched on and switching capacitor C_2 is switched to the first winding of switching transformer T_p . Under the influence of the emf induced on the second winding of the transformer, thyristor T_2 is switched off, while diode D_2 is switched on and the discharged storage capacitor C is connected to the electromagnet. The energy from the electromagnet enters the capacitor bank through the circuit consisting of L, R_2, C, R_1 . The length of the formed plateau depends on the time constant of the electromagnet and the moment in time that the storage capacitor is switched off:

$$t_u = \tau / 2 \lg^2 \omega t_k, \quad (2)$$

where τ is the time constant of the electromagnet.

The stability of the formed plateau is determined by the frequency with which the storage capacitor is switched to the electromagnet during the forming of the plateau and equals

$$\delta = \frac{\Delta I}{I} = 1 - \exp\left(-\frac{\tau - \rho \lg \omega t_k}{2n\tau \lg^2 \omega t_k}\right), \quad (3)$$

where n is the number of switchings of the storage capacitor to the electromagnet; ω, ρ - circular [sic] frequency and wave resistance of the circuit.

If a short plateau is required at the maximum electromagnet current value, then an auxiliary capacitor bank [3, 9] can be used for this purpose. This capacitor bank is switched to the circuit during the time that the plateau is forming. In such a system (Fig. 3) the plateau is formed as a result of the change in the natural frequency of the LC-circuit, while the energy dissipated in effective resistance of the electromagnet is compensated by the energy of buffer capacitor C_0 . The stability of the formed plateau

$$\delta = \frac{\Delta I}{I} = \frac{t_u^2}{8L(C_0 + C)} \quad (4)$$

These systems for "stretching" the pulse peak of the electromagnet current can be used in formed plateaus of short duration and when stability requirements for the shaped current are not high.

Formation of Highly Time-Stable Plateaus in Electromagnet Current Curve

Figure 4 shows a diagram of a pulsed power generator in which precharged capacitors $C_1, C_2, C_3, \dots, C_6$ with switching devices $T_1, T_2, T_3, \dots, T_6$ are alternately discharged onto the electromagnet through the double integrating element L_1C_0 and L_2C_0 for the purpose of maintaining and shaping the plateau. In this case the voltage on the buffer capacitor C_0 which switches the electromagnet during the shaping of the plateau is held almost constant and equal to the voltage drop on the electromagnet. The pulsed power generator is switched to the electromagnet at an electromagnet current which is either maximal or close to it.

The generator output (terminals A and B) should be switched parallel to one of the diodes, for example, \mathcal{A}_4 . In this case no additional gates (rectifiers) are required to protect the low-voltage capacitor bank C_0 from the high-voltage LC-circuit.

In their original state the cells of capacitors C_1 and C_2 are charged from the rectifier to the required voltage. The moment that thyristor T_1 of the first cell of the capacitors is engaged is assigned by the condition that the discharge current of capacitor C_1 must be approximately equal to the electromagnet current by the moment that the maximum electromagnet current is attained. During time $t_3 - t_2$ the discharge current of the capacitor flows through the circuit consisting of C_1, T_1, L_1, L, R with parallel-switched buffer capacitor C_0 , through which the current difference between the electromagnet and the pulsed power generator passes.

With a complete discharge of the capacitor diode \mathcal{A}_1 is switched on, and in the course of time t_6-t_3 , under the influence of voltage U_{c0} , the current and choke L_1 drops to zero. At moment in time t_4 thyristor T_2 is switched on and switches the capacitor C_2 of the other generator pole to the electromagnet through conductor L_2 . At the moment in time at which inductance L_1 drops to a zero value, capacitor C_3 is connected through thyristor T_3 to the load, whereupon thyristor T_4 responds and switches capacitor C_4 , etc., until the formation of the plateau is complete.

The frequency with which the thyristors in the capacitor cells open must be such that the average load discharge energy of the capacitors is equal to the energy dissipated on effective resistance of the electromagnet winding. Such alternative switching of the cells of capacitors $C_1, C_2, C_3 \dots$ through a dual integrating component makes it possible to substantially improve the shape of the applied voltage $E \approx U_{c0}$ to the electromagnet as compared to the working systems [2, 10], to obtain a satisfactory working mode for the control devices, and to utilize their average current more effectively.

The laws of change in current and voltage during discharge of a capacitor of any of the cells can be written as

$$U_c = E[1 + (K-1)\cos\omega t] ; \quad (5)$$

$$i_c = \rho E(K-1)\sin\omega t , \quad (6)$$

where ω and ρ represent the circular [sic] frequency and wave resistance of the circuit consisting of C_1L_1 and C_2L_2 ; K - dimensionless coefficient which indicates the number of times that the initial voltage on the capacitor cells exceeds the average value of the voltage applied to the electromagnet.

The discharge time of the capacitor of one of the cells into circuit C_0LR is determined as

$$\Delta t_1 = \frac{1}{\omega} (\pi - \alpha \arccos \frac{1}{K-1}) \quad , \quad (7)$$

while the time during which the current flows into inductors L_1 or L_2 after the discharge of the capacitor is determined as

$$\Delta t_2 = \frac{(K-2)}{\omega} \quad . \quad (8)$$

Figure 5 is a graphic representation in relative unit of some of the working characteristics of the generator.

Curve 1 is a dependence representing the relationship of the amplitude of the current formed in the electromagnet to the amplitude of the discharge current of the capacitor cells.

Curve 2 represents the ratio of maximal energy stored in the choke to the originally accumulated energy of one cell of the capacitors as a function of the ratio of voltage on the capacitor cells to the average voltage on the buffer capacitor.

Curve 3 represents the dependence of the ratio of the period of the main harmonic to the pulse length of the current through inductor L_1 or L_2 .

Curve 4 represents the dependence of the ratio of the amplitude of the main harmonic of the current and the output spectrum current of the generator to the amplitude of the electromagnet current.

The stability of the formed plateau in this variant of the pulsed power generator can be determined, when K is known as

$$\delta = \frac{(I_m/I_m) [(T/t_u) \cdot t_u]^2}{2\pi C_0 L} \quad . \quad (9)$$

Formula (9) enables us to select the buffer capacitance value and the number of cells in the capacitors which will assure the required stability of the formed plateau.

This pulsed power generator makes it possible to produce magnetic fields in an inductive load with a plateau which slowly increases, decreases, or changes according to a certain law. This is achieved by regulating the moment that the controlled devices in the capacitor cells are engaged [ignited], i.e., by changing the value of the energy which enters the circuit LRC_0 . For example, on the oscillogram (Fig. 6) the current in the electromagnet drops at the moment that the pulse peak is formed.

If the pulse repetition rate of the formed plateau is close to one, then the intermediate accumulation of energy in the LC-elements is not rational, and a direct current source should be used to shape the plateau.

In Fig. 7 we see one possible system which would enable us to obtain long, highly stable plateaus. In its original state energy storage capacitor C is charged, and a direct current flows through the winding of the electromagnet from a direct current source, which is connected to the midpoint of the winding through the thyristors and diodes. At the moment in time t_1 thyristor T_3 is switched on and connects the recharge switching capacitor C_1 to the first winding of the switching transformer. Under the effect of the voltage induced on the second winding the thyristors are switched off, and the energy storage capacitor is series-connected through the diodes to the following circuit: dc source, electromagnetic. The energy from the electromagnet enters the capacitor, while the current in it drops to zero.

At moment in time t_3 thyristors T_1 and T_2 are switched on and capacitor C discharges onto the electromagnet. Upon complete discharge of the capacitor the diodes are switched on, the current in the electromagnet is maintained for the required time, etc. The dc power supply source must provide at the output the power required for

the effective resistance of the electromagnet winding at the output voltage, which is equal to the voltage drop on this resistor.

The power supply system makes it possible in an inductive load to form magnetic fields which have different shapes in time: sinusoidal, stepped, triangular, etc. This is possible because of the artificial switching of the current from the thyristors to the diodes and vice versa at the necessary moments by familiar methods [5, 6, 8].

Conclusion

The examined shaping systems use the most efficient working modes: capacitors - unipolar with respect to voltage, electromagnets - unipolar with respect to current, and this makes it possible to substantially increase the technical and economic indicators of these systems [5, 7] and achieve programmed control of the shape of the magnetic cycle of the electromagnet in time.

BIBLIOGRAPHY

1. Averill R.I. IEEE Trans. Nucl. Sci., 3-16, No.3, 1047 (1969).
2. Millian T., Millian L. IEEE Trans. Nucl. Sci., 3-16, No.3, 704 (1969).
3. "Изв. РИАН СССР", т. 9, № 1, 1967.
4. Столов А.Н. и др. "Электротехника", № 1, 26 (1971).
5. Иванни В.В. В сб. "Электронные ускорители" (Труды УИ межвузовской конференции по электронным ускорителям, Томск, сентябрь 1968 г.). М., Атомиздат, 1970, вып. 3, стр. 27.
6. Иванни В.В., Сидайлов Г.А., ИТЭ, № 5, 151 (1966).
7. Иванни В.В., Фурман Э.Г. "Изв. ТПИ", 212, 134 (1971).
8. Сандлер А.С. и др. "Электричество", № 7 (1966).
9. Сиденко Л.Н. Вопросы разработки и исследования схемы однополярного импульсного питания синхротрона на 1,5 ГэВ. Диссертация, ТПИ, Томск, 1969.
10. Гусев О.А., Нечев А.Г. Авт. свид. № 210276, Бюллетень изобретений, № 6 (1968).

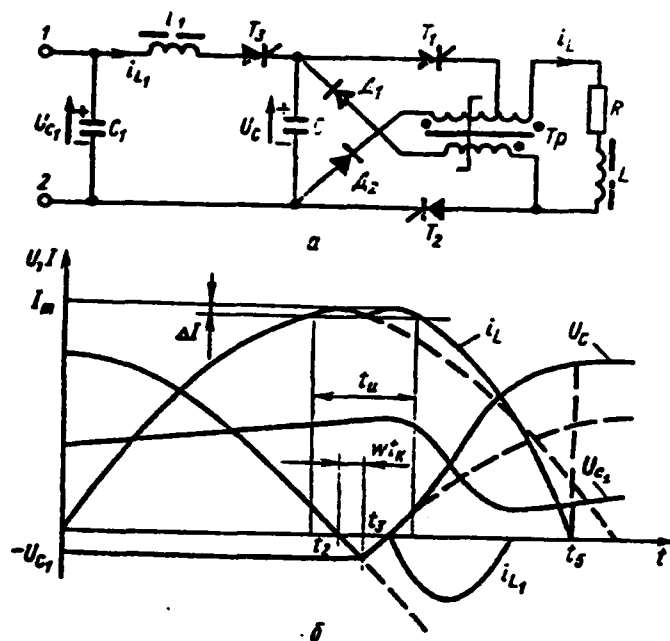


Fig. 1. Excitation of electro-magnet by unipolar current pulses.

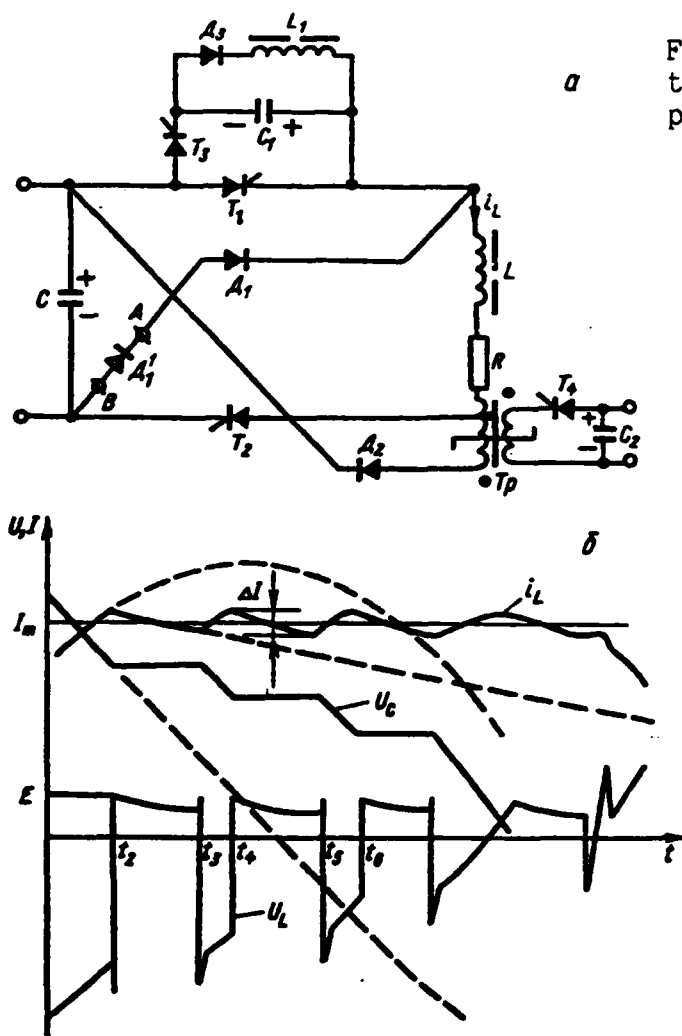


Fig. 2. Formation of quasi-trapezoidal current pulses with plateau.

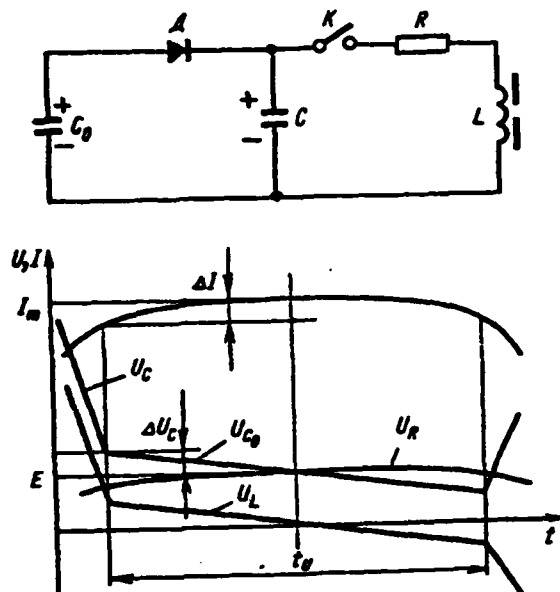


Fig. 3.

Fig. 3. Equivalent formation scheme of plateau from additional buffer capacitor bank.

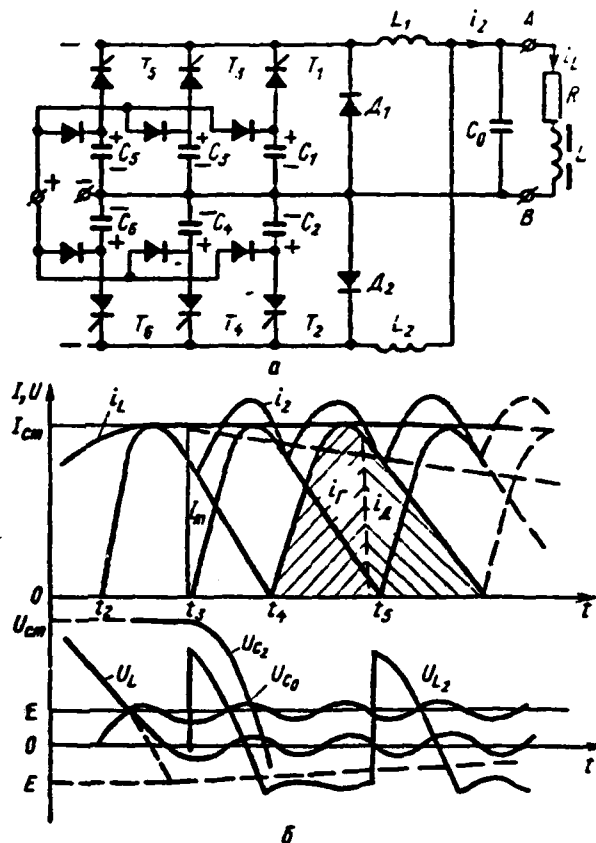


Fig. 4.

Fig. 4. Pulsed power generator system.

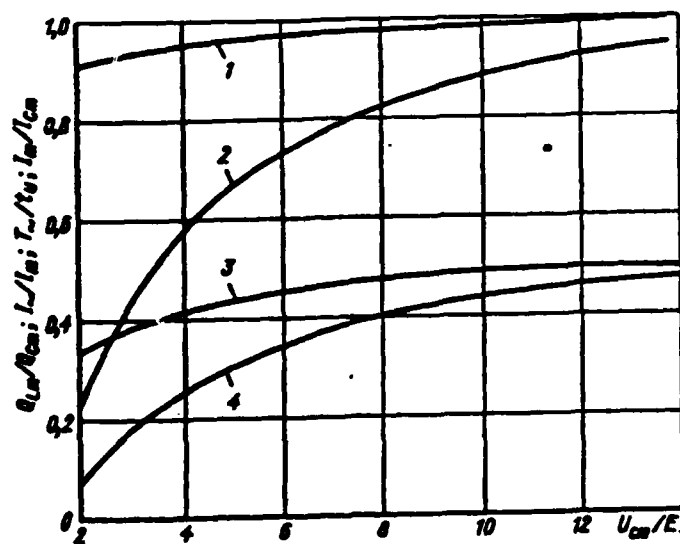


Fig. 5. Working characteristics of generator.

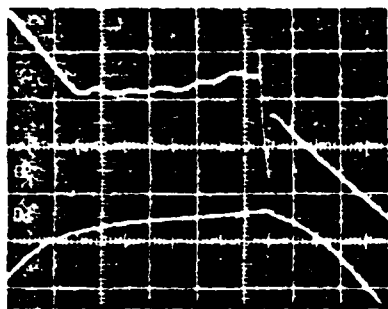


Fig. 6. Oscillogram showing voltage (top beam - 10 V/mm) and current (lower beam - 8 A/mm) of inductive load during forming of plateau which increases in time. Scanning period is $2 \cdot 10^{-3}$ s/cm.

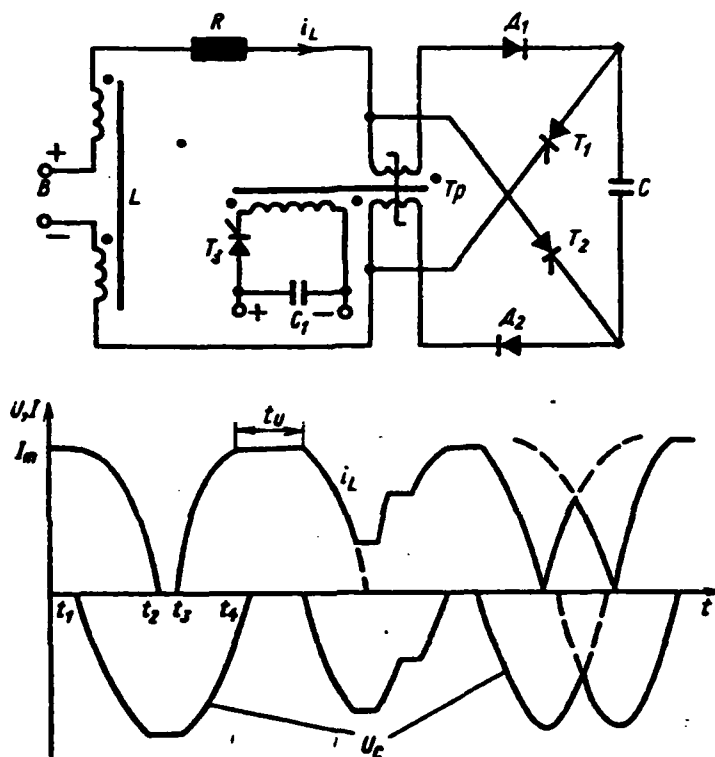


Fig. 7. Generator system for formation of current pulses of different shapes with respect to time.